

VRLA Battery Specification

---12V Series




6-FM-12^(12V12Ah)



Specifications

Nominal Voltage	12 V	
Nominal Capacity(C20)	12Ah(1.75V/cell@25°C)	
Dimensions	151*99*94*99mm	
Approx .Weight	3.30 kg (1 ±3%)	
Internal Resistance	Approx.15mΩ@25°C	
Terminal	F1、 F2	
Operating Temperature Range	Discharge: -20℃ ~ 55℃ (-4 ~ 104°F)	
	Charge: 0℃~ 40℃ (-4 ~ 104°F)	
	Storage : -20℃ ~ 55℃ (-4 ~ 122°F)	
Nominal Operating Temperature Range	25±3℃ (77±5°F)	
Max. Charging Current	3.6A @25°C	
Charging voltage(25°C)	Float : 2 .25V ~ 2 .30V/cell	
	Temp.Coefficient : -3mV/℃	
	Equalization : 2 .40V ~ 2 .45V/cell	
	Temp.Coefficient : -4mV/℃	
	Cycle : 2 .40V~2 .45V/cell	
	Temp.Coefficient : -5mV/℃	
Effect of temperature to rated Capacity(C20)	40℃ (104°F)	105%
	25℃ (77°F)	100%
	0℃ (32°F)	86%
Self Discharge	≤3%/month@ 25℃	
Casing material	ABS(UL94 HB or V-0 optional)	

Layout

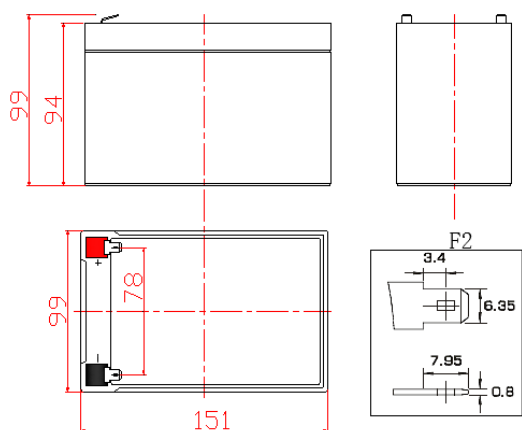

Constant Current Discharge*(Amperes @25°C/77° F)

Time	5min	10min	15min	30min	1h	2h	3h	4h	5h	8h	10h	20h
9.60V	45.6	28.8	21.0	13.8	7.8	4.32	3.12	2.46	2.11	1.413	1.155	0.618
10.20V	41.2	26.0	19.3	13.1	7.4	4.20	3.06	2.41	2.06	1.386	1.130	0.605
10.50V	39.6	25.0	18.0	12.7	7.2	4.14	3.00	2.40	2.04	1.373	1.117	0.600
10.80V	38.3	24.0	17.1	12.1	6.9	4.03	2.94	2.32	1.95	1.346	1.104	0.593
11.10V	34.7	21.8	16.4	10.9	6.8	4.03	2.90	2.30	1.93	1.333	1.090	0.586

Constant Power Discharge*(Watts/Unit @25°C/77° F)

Time	5min	10min	15min	30min	1h	2h	3h	4h	5h	8h	10h	20h
9.60V	84.8	54.1	43.3	24.3	15.0	8.41	6.13	4.89	4.19	2.71	2.28	1.231
10.20V	76.6	49.0	37.4	21.5	13.7	8.18	5.98	4.79	4.08	2.65	2.24	1.206
10.50V	73.6	47.0	35.4	21.0	13.2	8.06	5.93	4.76	4.06	2.64	2.23	1.200
10.80V	71.1	44.5	34.0	19.7	12.6	7.86	5.76	4.62	3.94	2.56	2.18	1.176
11.10V	64.5	40.9	31.1	19.0	12.1	7.51	5.50	4.38	3.73	2.43	2.10	1.130



VRLA Battery Specification

---12V Series



6-FM-12 (12V12Ah)

General Features

- 10 years design life
- Very low Self-discharge rate
- Wide range of operating temperature
- 100% Sealed and maintenance free
- Good conductivity
- Excellent charge acceptance
- Safe and reliable explosion-proof regulating valve


Applications

- Telecommunications
- UPS、Data Center
- Energy Storage, Electric Systems
- Emergency Lighting, Security
- Medical, Electronic Equipment
- Motive Power


Standards

- Compliant with IEC60896, IEC61427, GB/T19638, YD/T1360-2015, YD/T799, DL/T637
- Certified for TLC, CE, RoHS and Reach compliance
- The company Aokly is certified under TS16949, OHSAS18001, SA8000, ISO9001, ISO14001, ISO45001 and ISO50001 management systems


Discharge Characteristics(25°C)

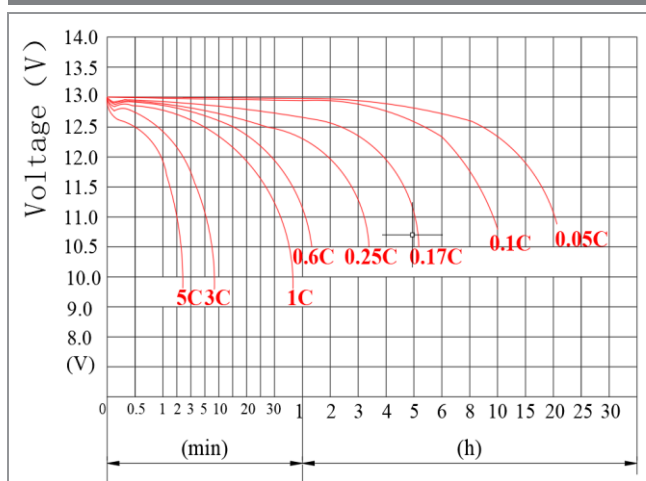

Charging Characteristics(25°C)

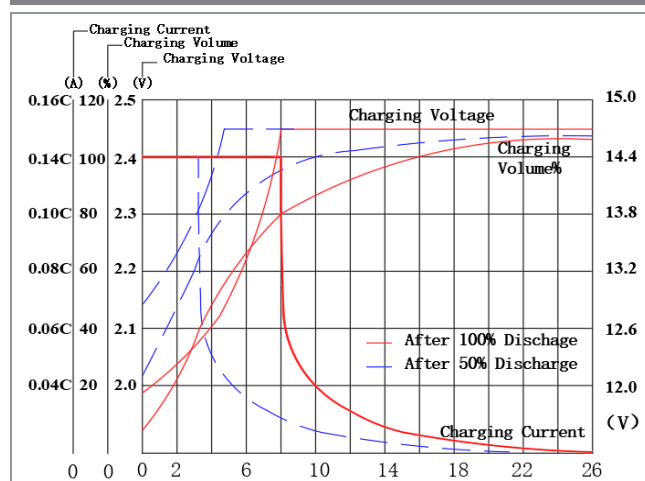

Rel. The between Temp. and Charging Volt.

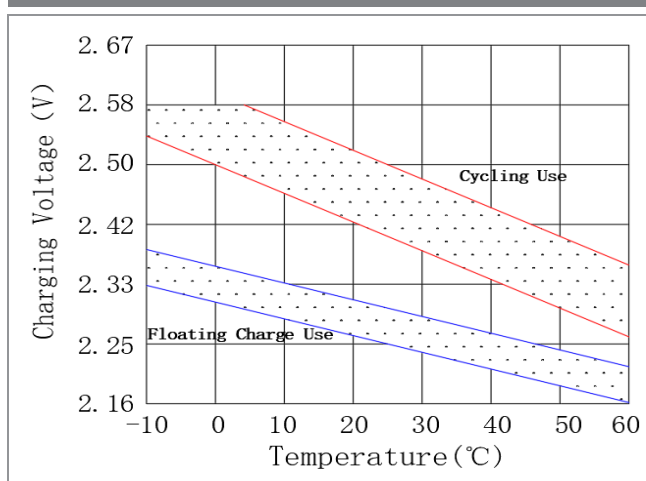

Capacity Retention Characteristics

