

6-QW-200(1100A), W250




The product has excellent high-current discharge characteristics and is widely used in starting, ignition, and lighting systems. It uses a grid made of lead-calcium alloy, requires no maintenance or water addition during use, has a long power storage time, and a wide applicable temperature range

PICTURE



DIMENSION

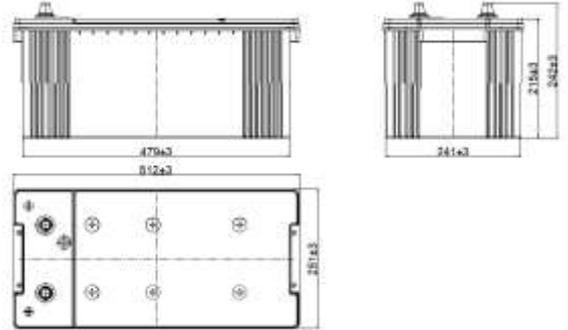


SPECIFICATION


Nominal Voltage/V	12	
Weight/±3%kg	55.4	
Nominal Capacity/Ah	210	
Reserve Capacity/min	410	
-18°C CCA/A	1100	
Max Dimensions	L/mm	512
	W/mm	251
	H/mm	215
	Total Height/mm	242
CCA	1300	
Temperature	Discharge/°C	-40~+60
	Charging/°C	-40~+60
	Storage/°C	-40~+60
Optimum Temperature/°C	+10~+30	
Constant Charging Current/A	22.0	
Constant Charging Voltage/V	13.5~13.8	
Max Charging Current/A	66.0	
Cover Material	PP	
Executive Standard	GB/T 5008-2023	

TERMINAL DIMENSION

Terminal Type	D/mm	
	Positive	Negative
T2	19.5 ⁺⁰ _{-0.3}	17.9 ⁺⁰ _{-0.3}

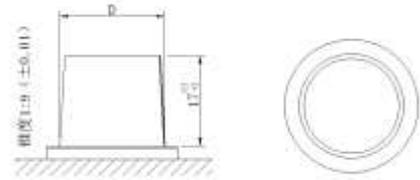

Discharge Curve / 25°C

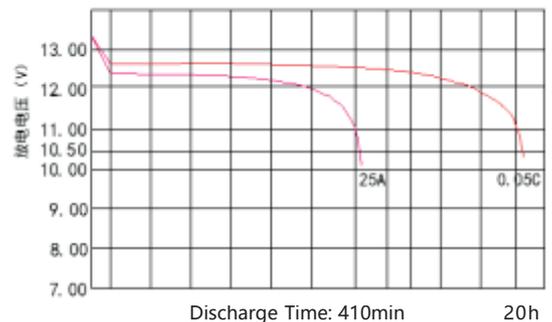

File Serial No.AKL/XC-6-QW-200T/02A