

# AGM Start Stop Battery Specification

## AGM L4




This product is specially designed for cars equipped with advanced start-stop systems. The radial grid, AGM adsorption electrolyte, self-developed paste curing patent, etc. make the battery safe and reliable, with excellent high-current discharge performance and good charge acceptance. And the characteristics of long deep cycle life.

### PICTURE



### DIMENSIONS

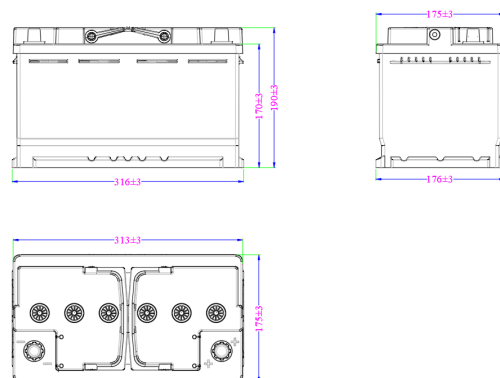


### SPECIFICATION


Q/V		12
Weight/±3%kg		22.5
Rated Capacity/AH		80
Reserve Capacity/min		140
-18℃ CCA/A		800
Max Dimensions	L/mm	316
	W/mm	175
	H/mm	190
	TH/mm	190
CCA/m Ω		880
Temperature	discharge/℃	-40 ~ 40
	charge/℃	-40 ~ 40
	store/℃	-40 ~ 40
Optimum temperature/℃		10-30
Constant charging current/A		8.0
Constant charging voltage/V		13.5-13.8
Max charging current/A		24
Cover material		PP
Executive standard		JB/T 2666-2016

### TERMINAL DIMENSIONS

TYPE	D/mm	
	positive	negative
T2	19.5 <sup>+0</sup> <sub>-0.3</sub>	17.9 <sup>+0</sup> <sub>-0.3</sub>

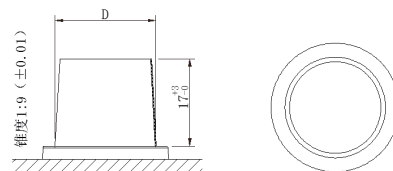

### Discharge curve/25℃

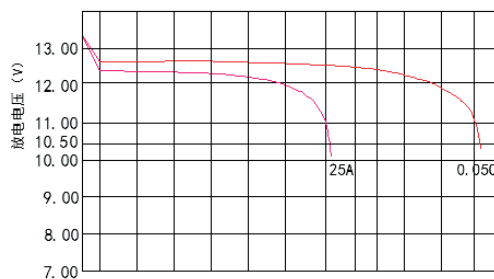

Discharge time: 140min 20h

