

AGM Start Stop Battery Specification

AGM L5




This product is specially designed for cars equipped with advanced start-stop systems. The radial grid, AGM adsorption electrolyte, self-developed paste curing patent, etc. make the battery safe and reliable, with excellent high-current discharge performance and good charge acceptance. And the characteristics of long deep cycle life.

PICTURE



DIMENSION

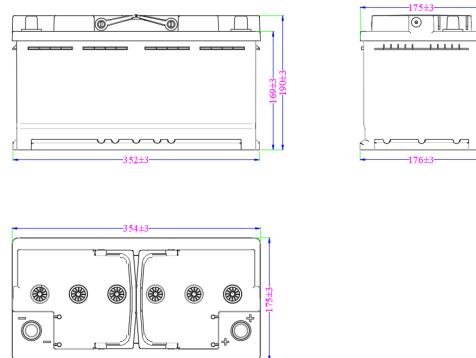


SPECIFICATION


Nominal Voltage/V		12
Weight/±3%kg		25.4
Nominal Capacity/Ah		95
Reserve Capacity/min		164
-18°C CCA/A		850
Max Dimensions	L/mm	354
	W/mm	175
	H/mm	190
	TH/mm	190
Internal Resistance/mΩ		980
Temperature	discharge/°C	-40 ~ 40
	charge/°C	-40 ~ 40
	store/°C	-40 ~ 40
Optimum temperature/°C		10-30
Constant charging current/A		9.5
Constant charging voltage/V		13.5-13.8
Max charging current/A		28.5
Cover material		PP
Executive standard		JB/T 2666-2016

TERMINAL DIMENSION

TYPE	D/mm	
	positive	negative
T2	19.5 ⁺⁰ _{-0.3}	17.9 ⁺⁰ _{-0.3}

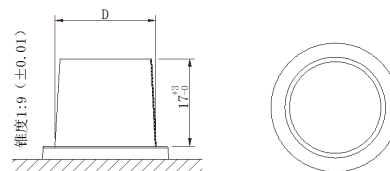

Discharge Curve/25°C

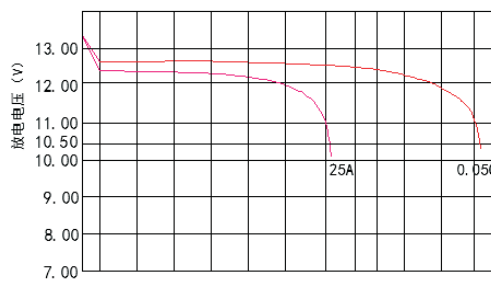

Discharge time: 164min 20h

